




STONE

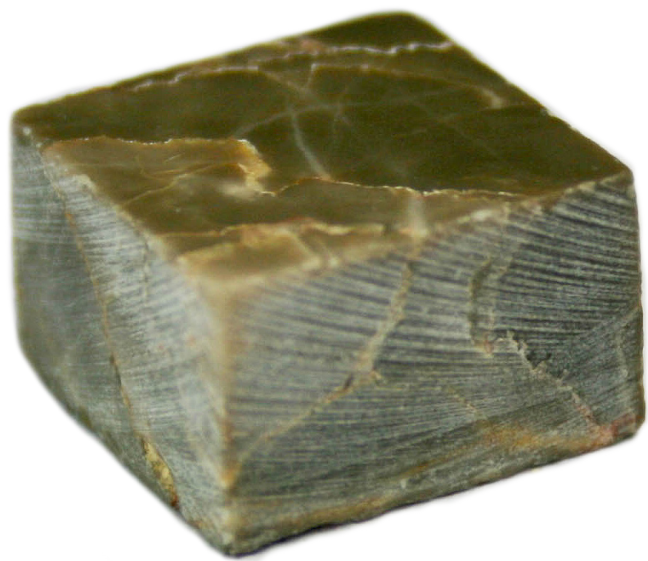

APPLICATIONS | PROFILES | SPECIFICATIONS | COLOR LINES

1" STONE

INFORMATION



SELECTION

1" x 1" x 3/8"

39 Colors



All colors available in Polished, Tumbled & Honed finishes

APPLICATIONS:

Residential/Commercial

Indoor/Outdoor

Wall/Flooring

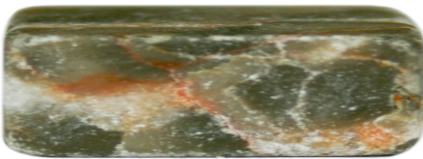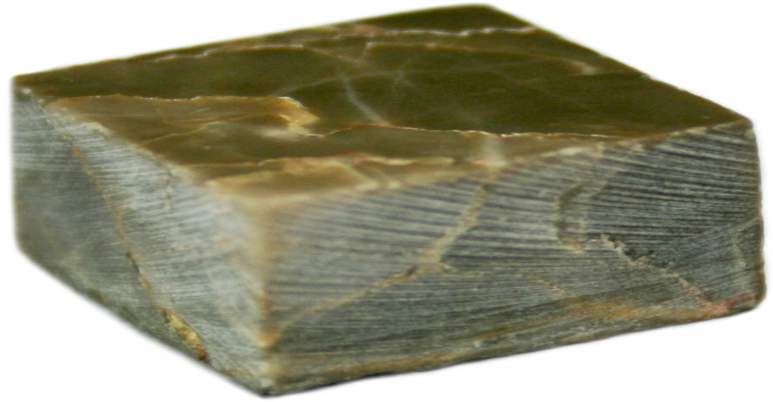

| Artaic Name | | | | | 1" Polished/Honed Stone A-1-ST-P&H200+ | 1" Tumbled Stone A-1-ST-T200+ |
|---|---|--|-----------------------|-----------------------|---|---|
| Artaic Inventory ID | | | | | | |
| ASTM | | | | | | |
| NOTES: All values vary across different types of stone. All Artaic stone passes ASTM standards for commercial floor use. | | | | | | |
| ASTM C-97: Density | Min lb/ft3 (g/cm3) = 162 (2.59) for structural use. | | | | 162.3 - 193.5 (2.60 - 3.095) | 162.3 - 193.5 (2.60 - 3.095) |
| ASTM C-97: Water Absorption | Impervious ≤ 0.5% | Vitreous 0.5-3% | Semi-Vitreous 3-7% | Non-Vitreous 7-20% | < /= 0.3% - Impervious | < /= 0.3% - Impervious |
| ASTM C-99: Modules of Rapture | Min psi (MPa) = 1000 (6.89) for structural use. | | | | 2235.12 - 4136.43 (15.4-28.5) | 2235.12 - 4136.43 (15.4-28.5) |
| ASTM C170: Compression Strength | Min psi (MPa) = 7500 (52) for structural use. | | | | 10,570 - 33,011 (72.9-227.6) | 10,570 - 33,011 (72.9-227.6) |
| ASTM C-241: Abrasion Resistance | Min Hardness = 10 for structural use. | | | | 18 - 25 | 18 - 25 |
| ASTM C-424: Cracking Resistance | One cycle pass-or-fail test | | | | Pass | Pass |
| ASTM C-880: Flexural Strength | Min psi (MPa) = 1000 (6.89) for structural use. | | | | 1117.56 - 5413.64 (7.7 - 37.3) | 1117.56 - 5413.64 (7.7 - 37.3) |
| ASTM C-499: Facial & Thickness Dimensions | Nominal Size | Value | | 0.94" x 0.94" | 0.9375" x 0.9375" | |
| | Caliber Range | Value | | Range: 0.027" | Range: 0.027" | |
| | Thickness | Value | | 0.375" | 0.315" | |
| Artaic Production SQFT: Dimensions | Nominal Size - Inches | Value | | 11.96875" x 11.96875" | 11.9375" x 11.9375" | |
| Artaic Production SQFT: Dimensions | Tile Count | Value | | 12 x 12 | 12 x 12 | |
| Artaic Production SQFT: Tiles / SQFT | Tile Count | Value | | 144 | 144 | |
| Artaic Production SQFT: Weight (no grout) | LBS | Value | | 4.5 | 4.25 | |
| Artaic Production SQFT: Weight (with grout) | LBS | Value | | 5 | 4.75 | |
| Artaic Production SQFT: Grout Width | Nominal Size - Inches | Value | | 0.0625 | 0.063 | |
| ASTM C-1028: Static Coefficient of Friction | C.O.F. 0 ≤ to ≤ 0.39 0.40 ≤ to ≤ 0.59 0.60 ≤ to ≤ 0.79 ≥ 0.80 | Resulting Classification Hazardous - Excessive: No floor use Satisfactory: Low to regular traffic residential use Satisfactory: Light traffic commercial use Excellent: All uses | | | Wet: 61 - Satisfactory Dry: 81 - Excellent | Wet: 61 - Satisfactory Dry: 81 - Excellent |
| ASTM C-1378: Staining Resistance | Resistance Class A B C D E | Max. # of samples that retain a stain 0 1 2 3 4 or more | | | Pass - Class A | Pass - Class A |

| | | |
|--|---|---|
| SEALANTS | | NOTES: Honed and tumbled stone needs to be sealed to prevent staining. Sealants have a negligible impact on metrics above. |
| Scenario 1 - Normal Sealing | For walls, backsplashes, etc., use a simple "Grout & Tile Sealer" solution available from several brands at many hardware stores | |
| Scenario 2 - Color enhanced Normal Sealing | For walls, backsplashes, etc., where a slight enhancement/darkening of the stone's natural color is desired, use a "Stone Enhancer & Sealer" available from several brands at many hardware stores. | |
| Scenario 3 - Sealing for Floor Use | For high traffic floor applications, use a "Penetrating Stone, Grout & Tile Sealer" available from several brands at many hardware stores. | |

9/16" STONE

INFORMATION

ARTAIC
INNOVATIVE MOSAIC

SELECTION

9/16" x 9/16" x 3/8"

39 Colors

All colors available in Polished, Tumbled & Honed finishes

APPLICATIONS:

Residential/Commercial

Indoor/Outdoor

Wall/Flooring



| Artaic Name Artaic Inventory ID | | 1/2" Polished/Honed Stone A-.5625-ST-P&H200+ | | | | 1/2" Tumbled Stone A-.5625-ST-T200+ |
|---|---|--|-----------------------|-----------------------|--------------------------------|--|
| ASTM | | NOTES: All values vary across different types of stone. All Artaic stone passes ASTM standards for commercial floor use. | | | | |
| ASTM C-97: Density | Min lb/ft3 (g/cm3) = 162 (2.59) for structural use. | | | | 162.3 - 193.5 (2.60 - 3.095) | 162.3 - 193.5 (2.60 - 3.095) |
| ASTM C-97: Water Absorption | Impervious ≤ 0.5% | Vitreous 0.5-3% | Semi-Vitreous 3-7% | Non-Vitreous 7-20% | </= 0.3% - Impervious | </= 0.3% - Impervious |
| ASTM C-99: Modules of Rapture | Min psi (MPa) = 1000 (6.89) for structural use. | | | | 2235.12 - 4136.43 (15.4-28.5) | 2235.12 - 4136.43 (15.4-28.5) |
| ASTM C170: Compression Strength | Min psi (MPa) = 7500 (52) for structural use. | | | | 10,570 - 33,011 (72.9-227.6) | 10,570 - 33,011 (72.9-227.6) |
| ASTM C-241: Abrasion Resistance | Min Hardness = 10 for structural use. | | | | 18 - 25 | 18 - 25 |
| ASTM C-424: Cracking Resistance | One cycle pass-or-fail test | | | | Pass | Pass |
| ASTM C-880: Flexural Strength | Min psi (MPa) = 1000 (6.89) for structural use. | | | | 1117.56 - 5413.64 (7.7 - 37.3) | 1117.56 - 5413.64 (7.7 - 37.3) |
| ASTM C-499: Facial & Thickness Dimensions | Nominal Size | Value | | 0.61" x 0.61" | 0.60" x 0.60" | |
| | Caliber Range | Value | | Range: 0.027" | Range: 0.027" | |
| | Thickness | Value | | 0.375" | 0.315" | |
| Artaic Production SQFT: Dimensions | Nominal Size - Inches | Value | | 11.96875" x 11.96875" | 11.9375" x 11.9375" | |
| Artaic Production SQFT: Dimensions | Tile Count | Value | | 18 x 18 | 18 x 18 | |
| Artaic Production SQFT: Tiles / SQFT | Tile Count | Value | | 324 | 324 | |
| Artaic Production SQFT: Weight (no grout) | LBS | Value | | 4.05 | 3.85 | |
| Artaic Production SQFT: Weight (with grout) | LBS | Value | | 4.55 | 4.33 | |
| Artaic Production SQFT: Grout Width | Nominal Size - Inches | Value | | 0.0625 | 0.063 | |
| ASTM C-1028: Static Coefficient of Friction | C.O.F. | Resulting Classification | | | | |
| | 0 ≤ to ≤ 0.39 | Hazardous - Excessive: No floor use | | | | |
| | 0.40 ≤ to ≤ 0.59 | Satisfactory: Low to regular traffic residential use | | | Wet: 61 - Satisfactory | Wet: 61 - Satisfactory |
| | 0.60 ≤ to ≤ 0.79 | Satisfactory: Light traffic commercial use | | | Dry: 81 - Excellent | Dry: 81 - Excellent |
| | ≥ 0.80 | Excellent: All uses | | | | |
| ASTM C-1378: Staining Resistance | Resistance Class | Max. # of samples that retain a stain | | | Pass - Class A | Pass - Class A |
| | A | 0 | | | | |
| | B | 1 | | | | |
| | C | 2 | | | | |
| | D | 3 | | | | |
| | F | 4 or more | | | | |

SEALANTS

NOTES: Honed and tumbled stone needs to be sealed to prevent staining. Sealants have a negligible impact on metrics above.

| | |
|--|--|
| Scenario 1 - Normal Sealing | For walls, backslashes, etc., use a simple "Grout & Tile Sealer" solution available from several brands at many hardware stores |
| Scenario 2 - Color enhanced Normal Sealing | For walls, backslashes, etc., where a slight enhancement/darkening of the stone's natural color is desired, use a "Stone Enhancer & Sealer" available from several brands at many hardware stores. |
| Scenario 3 - Sealing for Floor Use | For high traffic floor applications, use a "Penetrating Stone, Grout & Tile Sealer" available from several brands at many hardware stores. |

3/8" STONE

INFORMATION



SELECTION

3/8" x 3/8" x 3/8"

39 Colors

All colors available in Polished, Tumbled & Honed finishes

APPLICATIONS:

Residential/Commercial

Indoor/Outdoor

Wall/Flooring




| Artaic Name Artaic Inventory ID | | 3/8" Polished/Honed Stone | | | 3/8" Tumbled Stone | |
|---|---|--|-----------------------|-----------------------|---|---|
| ASTM | | NOTES: All values vary across different types of stone. All Artaic stone passes ASTM standards for commercial floor use. | | | | |
| ASTM C-97: Density | Min lb/ft3 (g/cm3) = 162 (2.59) for structural use. | | | | 162.3 - 193.5 (2.60 - 3.095) | 162.3 - 193.5 (2.60 - 3.095) |
| ASTM C-97: Water Absorption | Impervious ≤ 0.5% | Vitreous 0.5-3% | Semi-Vitreous 3-7% | Non-Vitreous 7-20% | </= 0.3% - Impervious | </= 0.3% - Impervious |
| ASTM C-99: Modules of Rapture | Min psi (MPa) = 1000 (6.89) for structural use. | | | | 2235.12 - 4136.43 (15.4-28.5) | 2235.12 - 4136.43 (15.4-28.5) |
| ASTM C170: Compression Strength | Min psi (MPa) = 7500 (52) for structural use. | | | | 10,570 - 33,011 (72.9-227.6) | 10,570 - 33,011 (72.9-227.6) |
| ASTM C-241: Abrasion Resistance | Min Hardness = 10 for structural use. | | | | 18 - 25 | 18 - 25 |
| ASTM C-424: Crazing Resistance | One cycle pass-or-fail test | | | | Pass | Pass |
| ASTM C-880: Flexural Strength | Min psi (MPa) = 1000 (6.89) for structural use. | | | | 1117.56 - 5413.64 (7.7 - 37.3) | 1117.56 - 5413.64 (7.7 - 37.3) |
| ASTM C-499: Facial & Thickness Dimensions | Nominal Size | Value | 0.375" x 0.375" | | 0.374" x 0.374" | |
| | Caliber Range | Value | Range: 0.027" | | Range: 0.027" | |
| | Thickness | Value | 0.375" | | 0.315" | |
| | Nominal Size - Inches | Value | 11.7261" x 11.7261" | | 11.7934" x 11.7934" | |
| Artaic Production SQFT: Dimensions | Tile Count | Value | 27 x 27 | | 27 x 27 | |
| Artaic Production SQFT: Tiles / SQFT | Tile Count | Value | 712 | | 712 | |
| Artaic Production SQFT: Weight (no grout) | LBS | Value | 3.98 | | 3.98 | |
| Artaic Production SQFT: Weight (with grout) | LBS | Value | 4.48 | | 4.33 | |
| Artaic Production SQFT: Grout Width | Nominal Size - Inches | Value | 0.0625 | | 0.063 | |
| ASTM C-1028: Static Coefficient of Friction | C.O.F. 0 ≤ to ≤ 0.39 0.40 ≤ to ≤ 0.59 0.60 ≤ to ≤ 0.79 ≥ 0.80 | Resulting Classification Hazardous - Excessive: No floor use Satisfactory: Low to regular traffic residential use Satisfactory: Light traffic commercial use Excellent: All uses | | | Wet: 61 - Satisfactory Dry: 81 - Excellent | Wet: 61 - Satisfactory Dry: 81 - Excellent |
| ASTM C-1378: Staining Resistance | Resistance Class A B C D E | Max. # of samples that retain a stain 0 1 2 3 4 or more | | | Pass - Class A | Pass - Class A |

SEALANTS


NOTES: Honed and tumbled stone needs to be sealed to prevent staining. Sealants have a negligible impact on metrics above.

| | |
|--|---|
| Scenario 1 - Normal Sealing | For walls, backsplashes, etc., use a simple "Grout & Tile Sealer" solution available from several brands at many hardware stores |
| Scenario 2 - Color enhanced Normal Sealing | For walls, backsplashes, etc., where a slight enhancement/darkening of the stone's natural color is desired, use a "Stone Enhancer & Sealer" available from several brands at many hardware stores. |
| Scenario 3 - Sealing for Floor Use | For high traffic floor applications, use a "Penetrating Stone, Grout & Tile Sealer" available from several brands at many hardware stores. |


3/8", 9/16", 1" STONE




200




201




202




203




204




230




231




233




234



235




351




353



354



355




356




364




365



380



381



382

P

P - Polished

T

T - Tumbled

H


H - Honed

*Colors are subject to change,
shade variations may occur.


3/8", 9/16", 1" STONE



205




206




207




208




209




290




291




292



293




294




357




358




360




361



362



383



384



385



386

P

P - Polished

T

T - Tumbled

H

H - Honed

*Colors are subject to change,
shade variations may occur.